


ISO 9001:2015 CERTIFIED COMPANY

FIXCORE

BUILT TO LAST · BONDED TO PERFECTION

Strong Bond,
Lasting Finish.

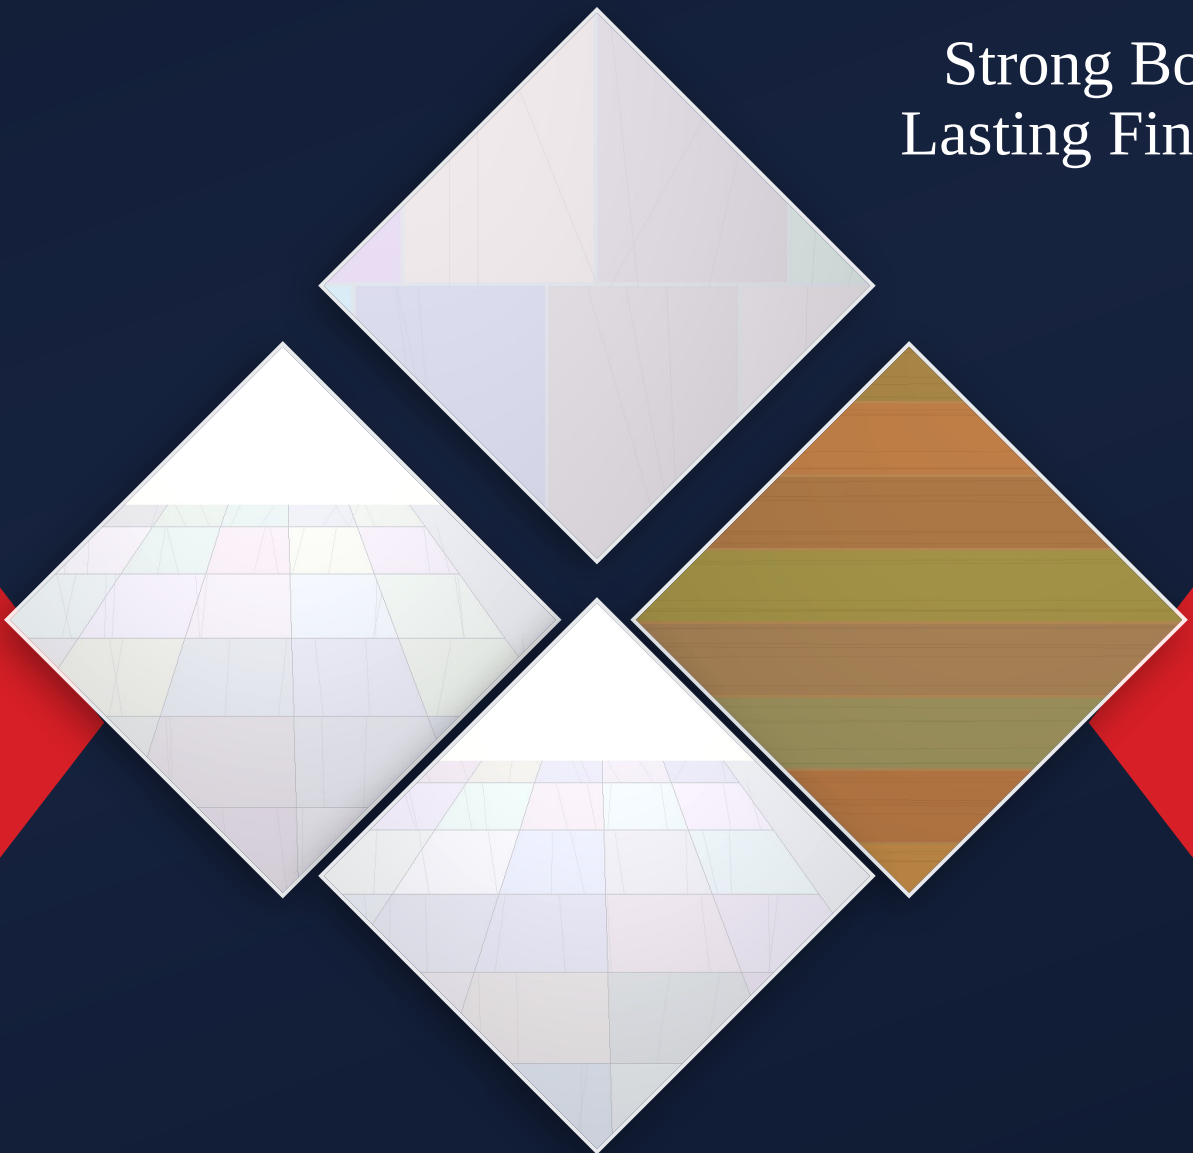

PREMIUM TILE ADHESIVE

WE ARE FIXCORE

ABOUT US

FIXCORE is a fast-growing Indian brand in the field of construction chemicals, recognised for premium quality tile adhesives and bonding solutions. Our polymer-modified cementitious adhesives are engineered for ceramic, vitrified, porcelain, marble and granite applications, delivering superior bond strength, workability and long-lasting performance on walls and floors.

MISSION

To build long-term relationships with our customers by delivering dependable products and exceptional service, driven by innovation, advanced technology and an uncompromising standard of strength.



INDEX

• FIXCORE T1	GRADE · Standard	01
• FIXCORE T2	GRADE · Premium	03
• FIXCORE T3	GRADE · Elite	05
• APPLICATION GUIDE		07
• COMPARE OUR GRADES		08

Bonded to
Perfection.



TILE ADHESIVE FIXCORE T1



PACKING. 20 Kg.

**FIXCORE™**

BUILT TO LAST · BONDED TO PERFECTION

T1 GRADE · C1T

Ideal for fixing new flooring, ceramic wall & floor tiles, tile on tile. Interior & exterior.

FIXCORE T1 Tile Adhesive



APPLICATION

FIXCORE T1 (C1T) is a polymer-modified cement based tile adhesive, suitable for fixing small wall and floor tiles in internal situations, new flooring and tile-on-tile. Interior & exterior. For difficult and demanding situations, consult FIXCORE regarding the use of a higher-performance adhesive.

FLOOR : 300x300, 400x400, 600x600, 800x800 mm

WALL : 300x300, 300x450, 300x600 mm

KEY FEATURES & BENEFITS

- Suitable for internal floor use
- Ready to mix
- High strength
- Consistent in quality
- Excellent bond strength
- Polymer modified additives

COVERAGE

Coverage depends on smoothness of substrate and mortar thickness. For a 3 mm bed thickness, coverage is 4.5 to 5 m² per 20 Kg bag.

SHELF LIFE & STORAGE

Best before 12 months from date of manufacture in unopened condition. Store in a dry & covered place.

PACKING

20 Kg.

TILE ADHESIVE

FIXCORE T2



PACKING. 20 Kg.



FIXCORE™
BUILT TO LAST · BONDED TO PERFECTION

T2 GRADE · C2TE S1

Ideal for fixing vitrified tiles, porcelain tiles, marble & granite and tile on tile. Interior & exterior.

FIXCORE T2 Tile Adhesive



APPLICATION

FIXCORE T2 (C2TE S1) is a high polymer-modified cement based tile adhesive, suitable for fixing wall & floor vitrified tiles, porcelain tiles, marble & granite, and tile on tile. Designed for both internal and external situations with excellent bond strength and workability.

FLOOR : 600x600, 800x800, 600x1200, 800x1600, 1200x1200 mm

WALL : 600x600, 600x1200 mm

KEY FEATURES & BENEFITS

- Suitable for internal & external use
- Ready to mix
- Fixes tiles over tiles
- High strength
- Consistent in quality
- Excellent bond strength
- Polymer modified additives
- Water & moisture resistant

COVERAGE

Coverage depends on smoothness of substrate and mortar thickness. For a 3 mm bed thickness, coverage is 4.5 to 5 m² per 20 Kg bag.

SHELF LIFE & STORAGE

Best before 12 months from date of manufacture in unopened condition. Store in a dry & covered place.

PACKING

20 Kg.

TILE ADHESIVE

FIXCORE T3



PACKING. 20 Kg.



FIXCORE™
BUILT TO LAST · BONDED TO PERFECTION

T3 GRADE · C2TES1

Ideal for fixing large slab vitrified tiles, marble, granite, terrazzo & natural stone. Interior & exterior.

FIXCORE T3 Tile Adhesive



APPLICATION

FIXCORE T3 (C2TES1) is a premium water & frost resistant, highly polymer-modified cementitious wall and floor tile adhesive, specially formulated for all large-slab vitrified tiles, mosaic & glass mosaic, ceramic, marble, granite, quartz stone, terrazzo and natural stone in interior & exterior locations, including use in swimming pools.

FLOOR : 800x1600, 1200x1800, 1200x2400, 1600x3200 mm, Granite & Stone Marble

WALL : 800x1600, 1200x1200 mm

KEY FEATURES & BENEFITS

- Suitable for internal & external use
- Water & frost resistant
- Fixes tiles over tiles
- High strength
- Consistent in quality
- Excellent bond strength
- Polymer modified additives
- Suitable for swimming pools

COVERAGE

Coverage depends on smoothness of substrate and mortar thickness. For a 3 mm bed thickness, coverage is 4.5 to 5 m² per 20 Kg bag.

SHELF LIFE & STORAGE

Best before 12 months from date of manufacture in unopened condition. Store in a dry & covered place.

PACKING

20 Kg.

DO IT RIGHT, THE FIRST TIME

APPLICATION GUIDE

Whichever FIXCORE grade you choose, following the correct application sequence is the difference between a tile that lasts a lifetime and one that doesn't. Here's how the professionals do it.

01

Prepare the Surface

Substrate must be clean, dry, sound and free from dust, oil, grease or loose particles. Repair any cracks or uneven areas before starting.

02

Mix to a Lump-Free Paste

Add FIXCORE powder gradually to clean water and mix with a slow-speed drill until you get a smooth, lump-free, creamy consistency. Let it stand for 5 minutes, then re-stir.

03

Comb an Even Bed

Spread adhesive with the flat side of the trowel first, then comb through with the notched edge in one direction for uniform ridge height and full contact.

04

Place & Align Within Open Time

Press the tile firmly with a slight twisting motion while the adhesive is still wet. Use spacers and levelling clips to keep joints straight and faces flush.

05

Cure Before Grouting

Allow a minimum of 24 hours undisturbed cure time before grouting, and avoid foot traffic on the fixed area during this period.

PRO TIP —

Always test a small area first when fixing large-format slabs, natural stone, or dark/light-sensitive stone. For difficult or demanding substrates, consult FIXCORE technical support before proceeding.

FIND YOUR PERFECT MATCH

COMPARE OUR GRADES

Every job is different — from a small bathroom re-tile to a full façade in natural stone. Use this at-a-glance comparison to pick the FIXCORE grade built for your surface.

SPECIFICATION	T1	T2	T3
STANDARD	C1T	C2TE S1	C2TES1
BEST FOR	Ceramic tiles, new flooring	Vitrified, porcelain, marble & granite	Large slabs, natural stone, pools
TILE SIZE	Small to medium	Medium to large	Large format & heavy stone
BOND STRENGTH	Standard	High	Extra high
WATER RESISTANCE	Good	Very good	Water & frost resistant
INTERIOR / EXTERIOR	Interior	Both	Both, incl. pools
COVERAGE @ 3MM	4.5–5 m²/bag	4.5–5 m²/bag	4.5–5 m²/bag
PACKING	20 Kg	20 Kg	20 Kg

Still unsure which grade fits your project? **Consult FIXCORE technical support** — we're happy to recommend the right adhesive for demanding or unusual substrates before you start.

FIXCORE

BUILT TO LAST · BONDED TO PERFECTION

Quality You Can Trust

DEALER & DISTRIBUTOR OF TILE ADHESIVES

FIXCORE · VAIBHAV RAI

Sales & Marketing



+91-7570091001



rajraivaibhav7839@gmail.com



Lucknow, Uttar Pradesh, India